
Wichard, 1 ZI de Felet, CS 50085, 63307 Thiers, France
Tél: +33 (0)4 73 51 65 00 — E-mail: marine@wichard.com

Captive pin D shackle - Dia 4 mm

Part #1401



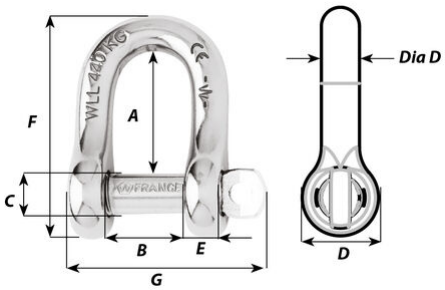

Description

Captive pin "D" shackle forged in grade 316L stainless steel
The pin is connected to the body at all times even when opened
The pin is locked into one of the indentations
No risks of loose due to vibrations
Outstanding working and breaking loads
le manillon ne peut se perdre
Single handed operation for more safety
WLL: only for industrial applications (lifting i.e...)
CE marking

Applications

Standard applications of shackle
Attachment applications: blocks, head ...

Technical information

	Materials	316 stainless steel grade
⛵	Working load (kg)	320
	WLL (kg)	200
	Breaking load (kg)	1000
	Weight (g)	9
	A (mm)	13
	B (mm)	8
	C (mm)	5
	D (mm)	9
	D diameter (mm)	4
	E (mm)	4
	F (mm)	24
	G (mm)	22

Caption

⛵ Working load (WL) : for nautical applications

Working Load Limit (WLL): for industrial applications only.
The safety factor is 5 times the breaking load.
WLL = Breaking load / 5

Wichard strives to ensure, to the best of its ability, the accuracy and the update of the information disseminated on this document, and reserves the right to correct at any time and without notice the content, as well as to evolve its products.

In the case of an industrial application, please contact our sales and technical department to validate the use of these products. The request for certificates can be made directly with the sales department when ordering the products.

Non-contractual pictures.

© Wichard 2026