
Wichard, 1 ZI de Felet, CS 50085, 63307 Thiers, France
Tél: +33 (0)4 73 51 65 00 — E-mail: marine@wichard.com

# Thimble shackle -captive pin - Dia 8 mm

Part #1494



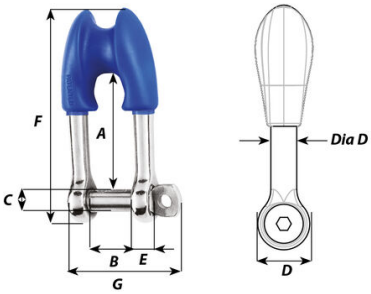


## Description

Thimble shackle with captive pin forged in grade 316L stainless steel
Allows to spliced a rope without adding and additional thimble
With the captive pin, no risk to lose the pin
Outstanding working and breaking loads

## Applications

Mainsheet halyards
Max rope size: 12 mm

## Technical information

| | Materials | 316 stainless steel grade |
|---|---|---|
| ⛵ | Working load (kg) | 1000 |
| | Breaking load (kg) | 3000 |
| | Weight (g) | 78 |
| | A (mm) | 41 |
| | B (mm) | 16 |
| | C (mm) | 8 |
| | D (mm) | 16 |
| | D diameter (mm) | 8 |
| | E (mm) | 7 |
| | F (mm) | 76 |
| | G (mm) | 42 |

### Caption

⛵ Working load (WL) : for nautical applications

Working Load Limit (WLL): for industrial applications only.
The safety factor is 5 times the breaking load.
WLL = Breaking load / 5

Wichard strives to ensure, to the best of its ability, the accuracy and the update of the information disseminated on this document, and reserves the right to correct at any time and without notice the content, as well as to evolve its products.

In the case of an industrial application, please contact our sales and technical department to validate the use of these products. The request for certificates can be made directly with the sales department when ordering the products.

Non-contractual pictures.

© Wichard 2026